


PGM-250

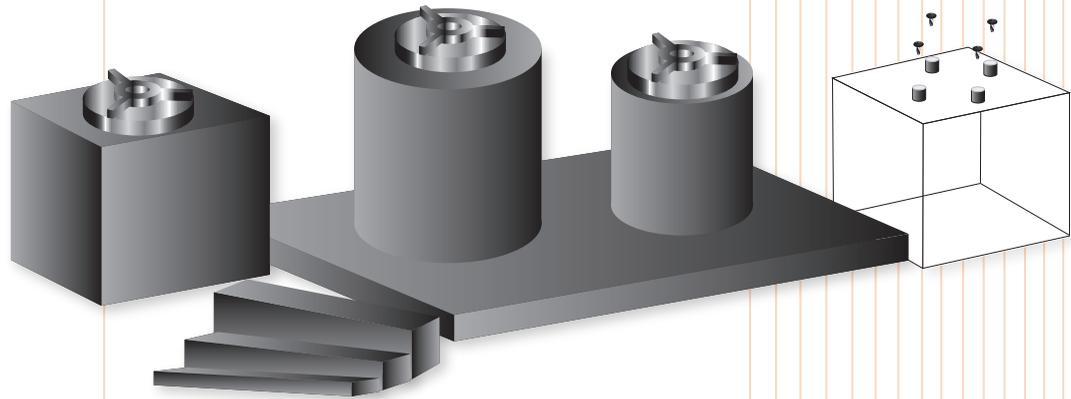

GENERAL

Isomolded, very fine micro grain, high strength, isotropic graphite.

APPLICATION

An excellent EDM material which yields both good metal removal rates and excellent electrode wear. Produces a surface finish 4.0 Ra μm .

PROPERTIES

Bulk Density	1.82 gm/cm ³
Average Grain Size	.0003 in
Specific Resistance	.00050 ohm in
Flexural Strength	8,200 PSI
Compressive Strength	17,200 PSI
Hardness:	65 Shore

FULL STOCKING DISTRIBUTOR OF EDM SUPPLIES, MOLD COMPONENTS & POLISHING SUPPLIES.

11650 96TH AVE. N.
MINNEAPOLIS, MN 55369

PN: 763-424-1189 TF PN: 800-888-9080

FX: 763-424-9460 TF FX: 800-299-9954

WWW.EDMSALESINC.COM

PGM-250